
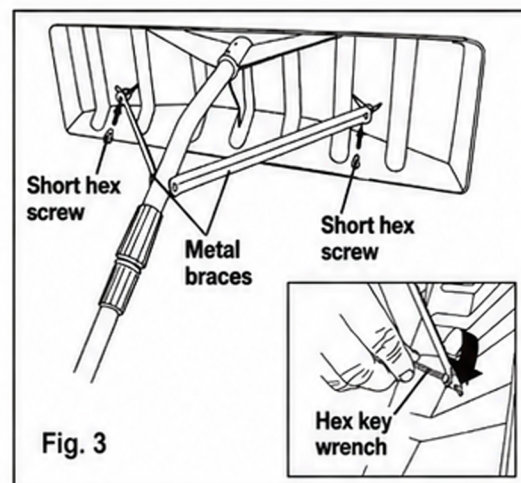
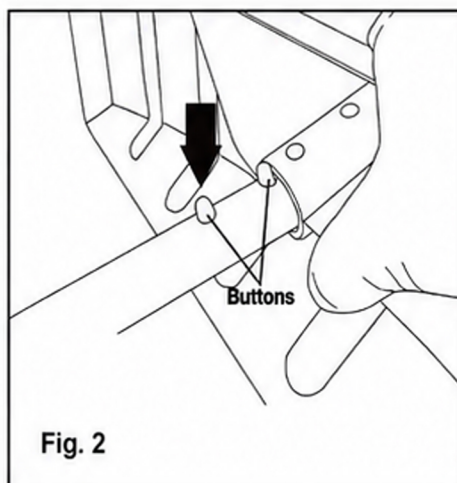


Assembly & Handle Adjustment

- 1** Loosen knob and extend pole to reveal holes.

- 2** Press buttons and insert handle into scraper head.

- 3** Attach metal braces using 2 short hex screws.

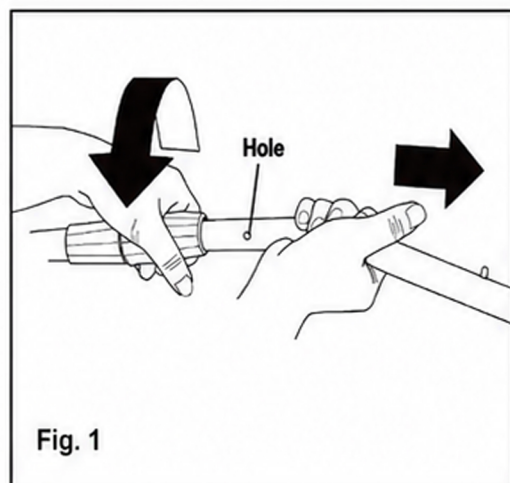

- 4** Secure braces to pole with the long hex screw and locking nut. Tighten with wrench.

- 5** Extend pole by turning knob clockwise. Lock by turning counterclockwise.

